




## BluCHIP DDE4DP-E2M

BluCHIP Destination Dispatch Elevator Single Processor Kit for up to 4 Elevator Cars

The BluCHIP DDE4DP-E2M is a Destination Dispatch Single Processor Kit that supports up to 4 elevator cars. The kit is configured with space to add backup battery and utilizes an FPO power supply to generate 12 or 24VDC. The kit includes BluSKY Destination Dispatch Elevator Software for up to 4 elevator cars, a single industrial BluCHIP DDE Processor, a locking enclosure with tamper and power supply with remote power monitoring and management. All Destination Dispatch Elevator installations require BluCARE DDE Support Professional Services.

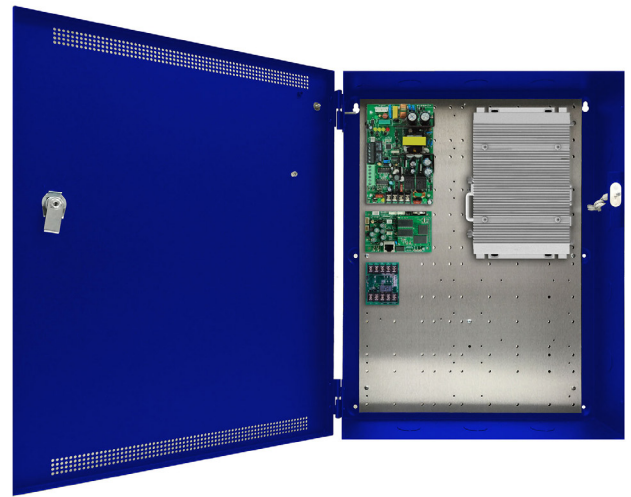

### System Features

#### FPO offline power supply

- 120 or 230 VAC input
- 12 and 24 VDC outputs
- On board Fire Alarm Interface
- Continuous and resettable DC

#### Distributed output module

- Four, controlled fused at 3A each
- Eight, auxiliary Class II P limited at 2.5A each

#### Expansion options

- Increased power, multiple voltages
- Additional distribution outputs
- Power management

### Enclosure Features

#### Labor saving design

- Unified power and security in one enclosure
- Pre-wired power section
- Removeable backplate simplifies installs
- Speed kit is included for power and data wiring

#### Additional benefits

- Wire management room
- 4.5" enclosure depth fits battery set
- Tamper switch, lock, dual key set standard
- Mounting hardware for access boards included

### Specifications

#### Input Power:

- Input 120/230VAC 50/60Hz | 100 Watts
- Overload and short circuit protection
- Over temperature protection
- Polarized AC power supply disconnect

#### Output Power:

- 75W Total Output Power | 12VDC/6A or 24VDC/3A
- FPO Board Outputs: Continuous (DC1), Resettable (DC2)
- 120mV Output Voltage Ripple | System Efficiency: 85% | System BTU Rating: 33 BTU/Hr

#### Battery Charging:

- Independent built-in 1A (FPO75) Charger for sealed lead-acid or gel type batteries
- Microprocessor dual rate charging of 12 or 24V battery sets
- Automatic switchover to standby battery when AC fails
- Zero voltage drop when switched over to battery backup

#### Power and Enclosure Regulatory Compliance:

- UL294, UL603, UL864, UL1076, UL1481, UL2044, UL2572, ULC S318, ULC S319, ULC S527,
- CSA C22.2 #107.1, FCC Part 15, CSFM Approved

#### DDE Processor Regulatory Compliance:

- EMC: CE/FCC Class A, CCC, BSMI
- Safety: UL, CCC, BSMI, CB

#### Destination Dispatch Elevator Processor:

- xxxx

#### Size and Weight:

- 20.00"H x 16.00"W x 4.50"D | 28 lbs.

## Recommended board layout



## Kit Includes

MFG Part #	BluBØX Order #	QTY	Description
815-5025	815-5025	1	BluSKY: DDE Software License for up to 4 Cars
	461-1000	1	Destination Dispatch Elevator Processor
FPO75-E2M	670-1320	1	LifeSafety Power: Single voltage power supply, includes enclosure
NL2	670-2000	1	LifeSafety Power: Remote Power Monitoring & Management Module for up to 2 FPO devices

## Professional Services

MFG Part #	BluBØX Order #	QTY	Description
800-5125	800-5125	1	BluCARE DDE Support

## Ordering Information

BluBØX Order #	Description
770-1000	BluCHIP Destination Dispatch Elevator Single Processor Kit for up to 4 Elevator Cars

BluBØX: Security Re-Imagined

[www.blub0x.com](http://www.blub0x.com)

e. [info@blub0x.com](mailto:info@blub0x.com)

p. (844) 425-8209

FOLLOW US ON  

BluBØX Security, Inc. is a manufacturer and service provider of web-cloud based physical security products. Its BluSKY service delivers enterprise class unified access control, alarm management, video surveillance, biometrics and visitor management on any device, anywhere, any time. Its BluCHIP open hardware platform provides industry standard components and a proprietary line of fully integrated multi-factor, multi-biometric Person Readers.

Copyright © 2016 BluBØX Security, Inc. All rights reserved.