



Aperio® Technology

ASSA ABLOY

Wireless possibilities for online access control

The global leader in door opening solutions





Aperio (Latin) / a'pe.ri.o/ –
to uncover, open

Designed for easy integration into existing access control systems, the wide range of Aperio-enabled devices allows facilities to add access control to more applications than ever before.

ASSA ABLOY ELECTRONIC SECURITY HARDWARE
HES | Securitron

HES K100 & KS100 Cabinet Locks
*Ideal for cabinets, lockers & drawers –
for healthcare, higher education
and IT/data centers*

Securitron AS100 Sensor
*Ideal for door position
and dry contact sensing*

Securitron R100 Reader
*Ideal for glass, stone
and brick entryways*



A100 Electrified Trim
*Ideal for aluminum and
glass storefront doors*



IN100 Lock
*Ideal for commercial and
educational applications*

SARGENT

IN100 and PR100 Locks
*Ideal for glass, stone
and brick entryways*

An innovative new approach to online access control

Aperio® technology is a global wireless platform that reduces the cost and inconvenience of traditional access control, with the flexibility to address any application.


Aperio utilizes local wireless communication between the lock and a communications hub to connect to an electronic access control system. You can easily expand the reach of existing access control systems and secure openings that would otherwise go unprotected.

With the global range of Aperio-enabled locks from ASSA ABLOY, online access control can be easy and cost-effective at any opening, with standardization across locations worldwide.

Advanced Capabilities

- No complex site surveys
- Minimal field configuration
- Simplified installation at the opening
- Fully-encrypted AES 128 wireless communication (IEEE 802.15.4)
- Real-time authentication and alarms

Easily expand the reach of your existing access control system

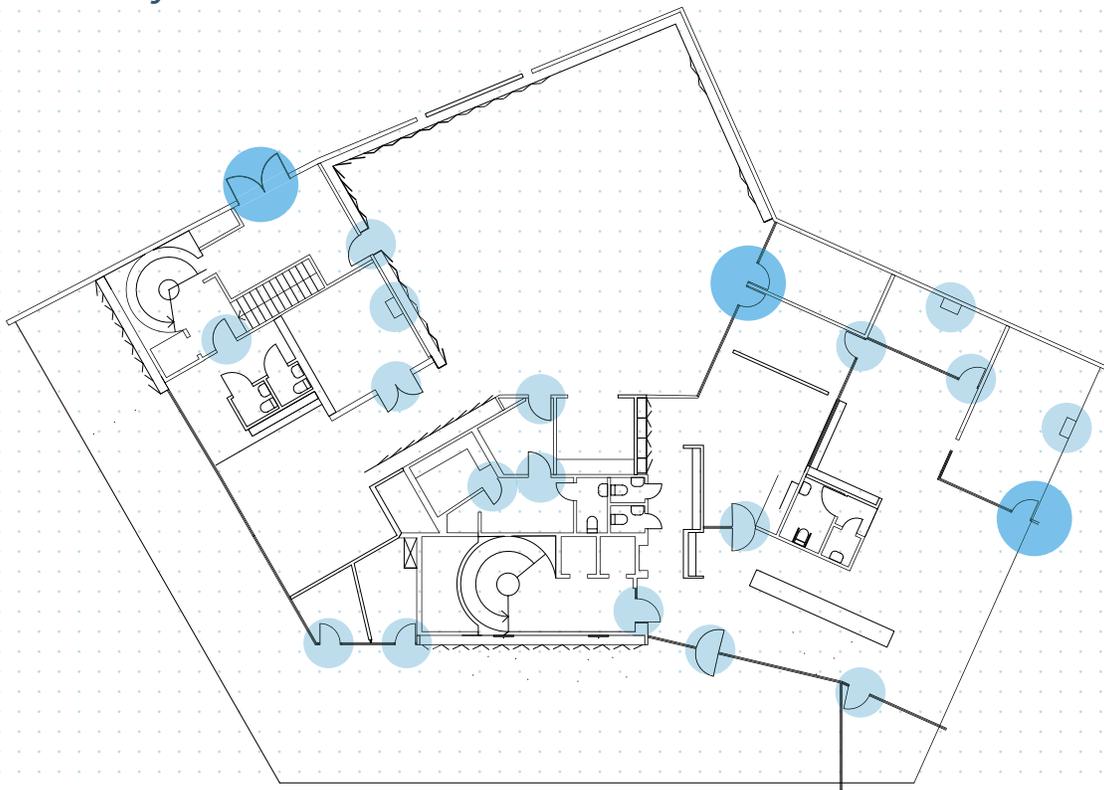

- Wired Access Control Door
- Aperio-Enabled Door

Aperio® at a Glance

Locking Devices

Brand	Product Name	Credentials					Device Types Available						Typical Applications	Monitoring					
		Prox only	iCLASS only	iCLASS SE*	multiCLASS SE*	Keypad (1-16 digit PINs)	Mortise Lock	Cylindrical Lock	Exit Device	Cabinet Lock	Electrified Trim	Surface Mounted Reader		Door Position Sensor	Door Position Switch	Request to Exit	Tamper	Battery	Other
ADAMS RITE	A100	•	•			•				•				Aluminum and glass narrow stile entrance systems	• [^]	• [^]	•	•	
CORBIN RUSSWIN	IN100				•		•	•	•					Commercial openings (offices, conference rooms, budget sensitive customers); schools	•	•	•	•	
HES	K100	•	•	•					•					Cabinets, lockers and drawers	•		•	•	Lock jamb
HES	KS100	•	•	•					•					Server cabinets/racks with swing handle	•		•		
SARGENT	IN100				•		•	•	•					Commercial openings (offices, conference rooms, budget sensitive customers); schools	•	•	•	•	
SARGENT	PR100	•	•			•	•	•	•					Institutional openings (schools, hospitals)	•	•	•	•	Dead bolt
SECURITRON	AS100											•		DPS monitoring; Form C relay	•			•	
SECURITRON	R100	•	•	•							•			Glass doors; marble, granite, concrete or other surfaces			•	•	


* iCLASS SE locks support HID iCLASS®, iCLASS SE® (SIO-enabled), iCLASS Seos®, SIO on MIFARE Classic®, SIO on MIFARE® DESFire® EV1, MIFARE Classic, DESFire EV1, NFC-enabled mobile phones

multiCLASS SE locks support HID Prox®, AWID, EM4102, HID iCLASS®, iCLASS SE® (SIO-enabled), iCLASS Seos®, SIO on MIFARE Classic®, SIO on MIFARE® DESFire® EV1, MIFARE Classic, DESFire EV1, NFC-enabled mobile phones

[^] Available as optional accessory



Wireless
possibilities
for online
access control.

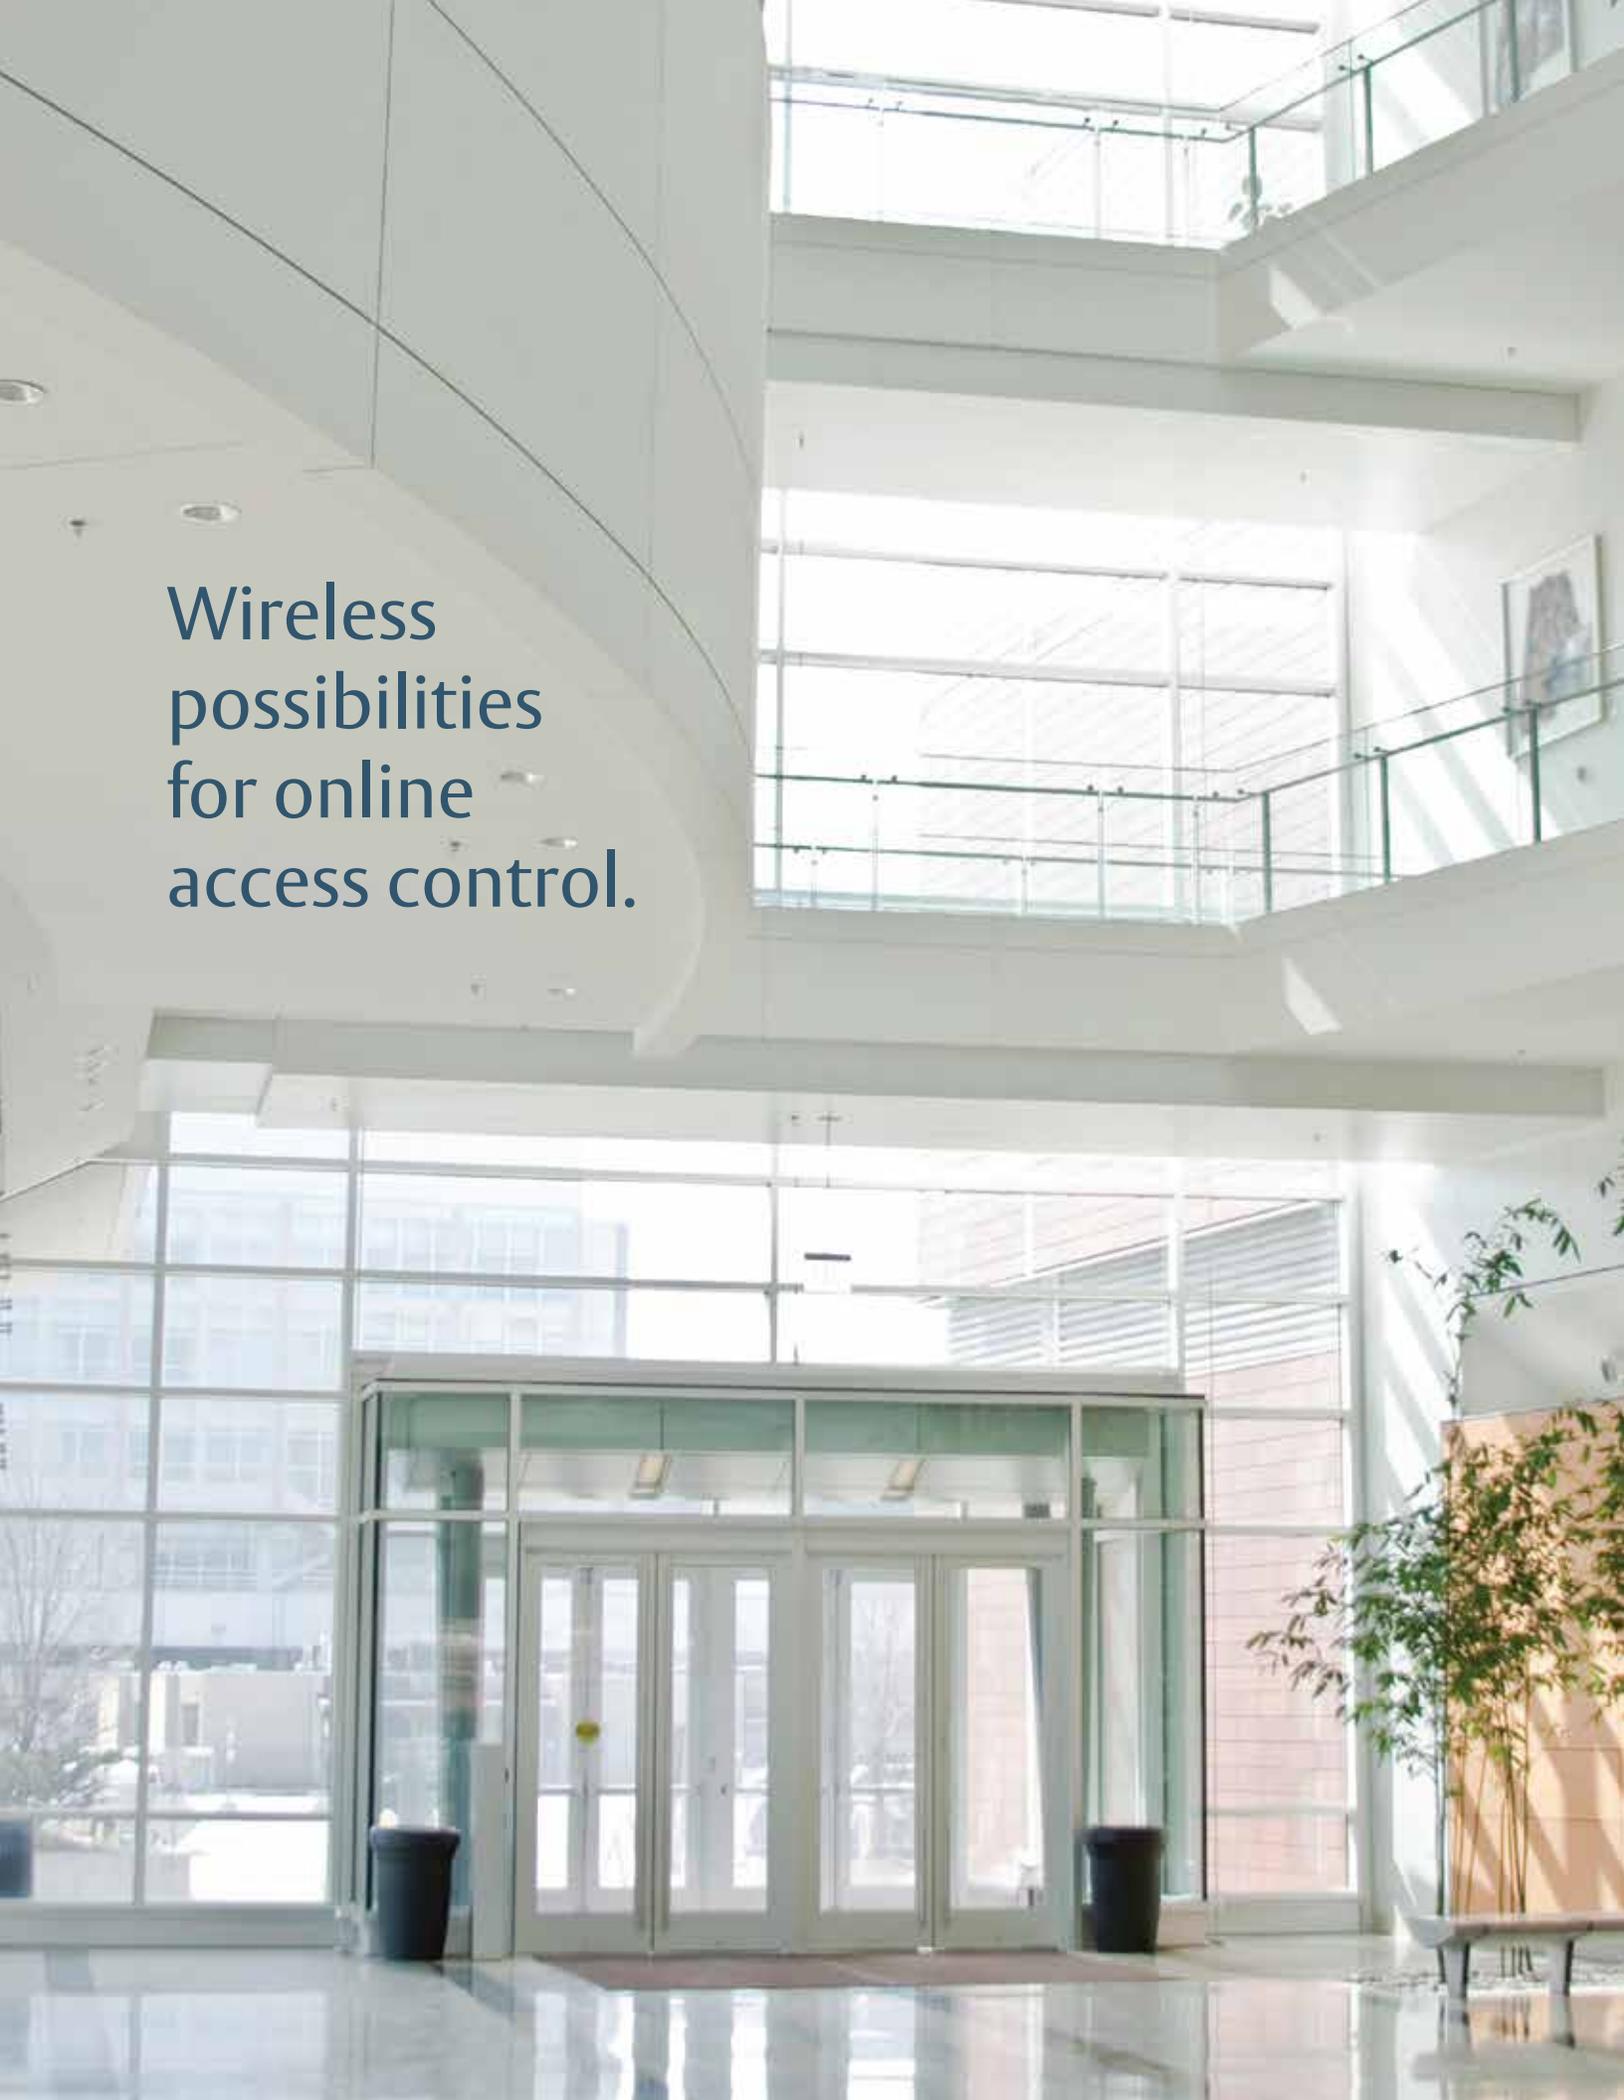



Quick, easy wireless deployments.

AS100 Sensor

Provide a wireless door position sensor monitoring solution to Aperio openings

The Securitron AS100 wireless door position sensor with Aperio® technology is an attractive way to add a DPS monitoring solution to aesthetically demanding entries. The AS100 mounts easily to the frame and monitors the position of the door. The signal is then wirelessly transmitted to an Aperio hub. It integrates securely and easily into existing access control systems.

The AS100 can be used on its own or as an elegant complement to an R100 to provide wireless credential and DPS monitoring for glass entryways.



AS100 Features & Benefits

- Adheres to glass and other aesthetically demanding door frame surfaces without any connecting wires
 - Maintains the clean aesthetic of glass entryways
 - Ideal for other difficult-to-wire locations
- Quick and easy installation
 - Less wire to pull reduces installation costs
- Monitors current door status (open/closed)
- Supplement to ASSA ABLOY door readers for combined wireless credential and DPS signal
 - Complements Medeco M100 mortise cylinders
- Can also be used for dry contact sensing using the 3.5 mm jack

R100 Surface Mounted Reader

R100 Features & Benefits

- Adheres to glass and other aesthetically demanding surfaces without any connecting wires
 - Maintains the clean aesthetic of glass, stone, granite or marble entryways
 - Ideal for other difficult-to-wire locations
- Quick and easy installation
 - Less wire to drill or pull reduces installation costs
- Environmentally sealed electronics provide protection from moisture, heat and cold
- Complements ASSA ABLOY electrified locking devices including electromagnetic locks, electric strikes, electric locks and electrified exit devices
- Credential support:
 - 13.56 MHz credentials (SE option):**
 - HID iCLASS®
 - iCLASS SE® (SIO-enabled)
 - iCLASS Seos®
 - ISO 14443B UID
 - MIFARE Classic®
 - MIFARE Plus®
 - MIFARE DESFire® SE
 - MIFARE DESFire EV1
 - NFC-enabled mobile phones
 - 125 kHz credentials (PA option):**
 - HID Prox
 - EM Prox
 - AWID Prox

Extend elegant access control to hard-to-secure entryways

The Securitron R100 surface mounted wireless reader with Aperio® technology offers an aesthetically appealing way to extend access control to glass, stone, granite or marble entryways. As an elegant complement to an electronic locking solution, the R100 wirelessly transmits credentials for request to entry. Glass, stone and brick entryways can now integrate robust access control while maintaining a clean, wireless appearance.



A100 Electrified Trim

Provides unique access control for narrow stile aluminum doors


A100 Features & Benefits

- Compatible with Adams Rite MS® Series Deadlocks, 4500/4900 Series Deadlatches, and 8000 Series Exit Devices; Yale 7200 Series; Corbin Russwin ED4000 Series exit devices only
- Surface mounted with concealed fasteners
- Key override via mortise cylinder
- Clutch-protected cast zinc alloy handle; field selectable handing
- Audit trail limited by EAC
- Optional Request to Exit (REX) and Door Position Switch (DPS) monitoring, ordered separately
- Credential support:
 - High Frequency (13.56 MHz):**
 - HID iCLASS®
 - ISO 14443b UID
 - MIFARE Classic®
 - MIFARE Plus®
 - MIFARE® DESFire® EV1
 - Low Frequency (125 kHz):**
 - HID® Prox
 - EM Prox
 - AWID Prox





Access control in a flash.

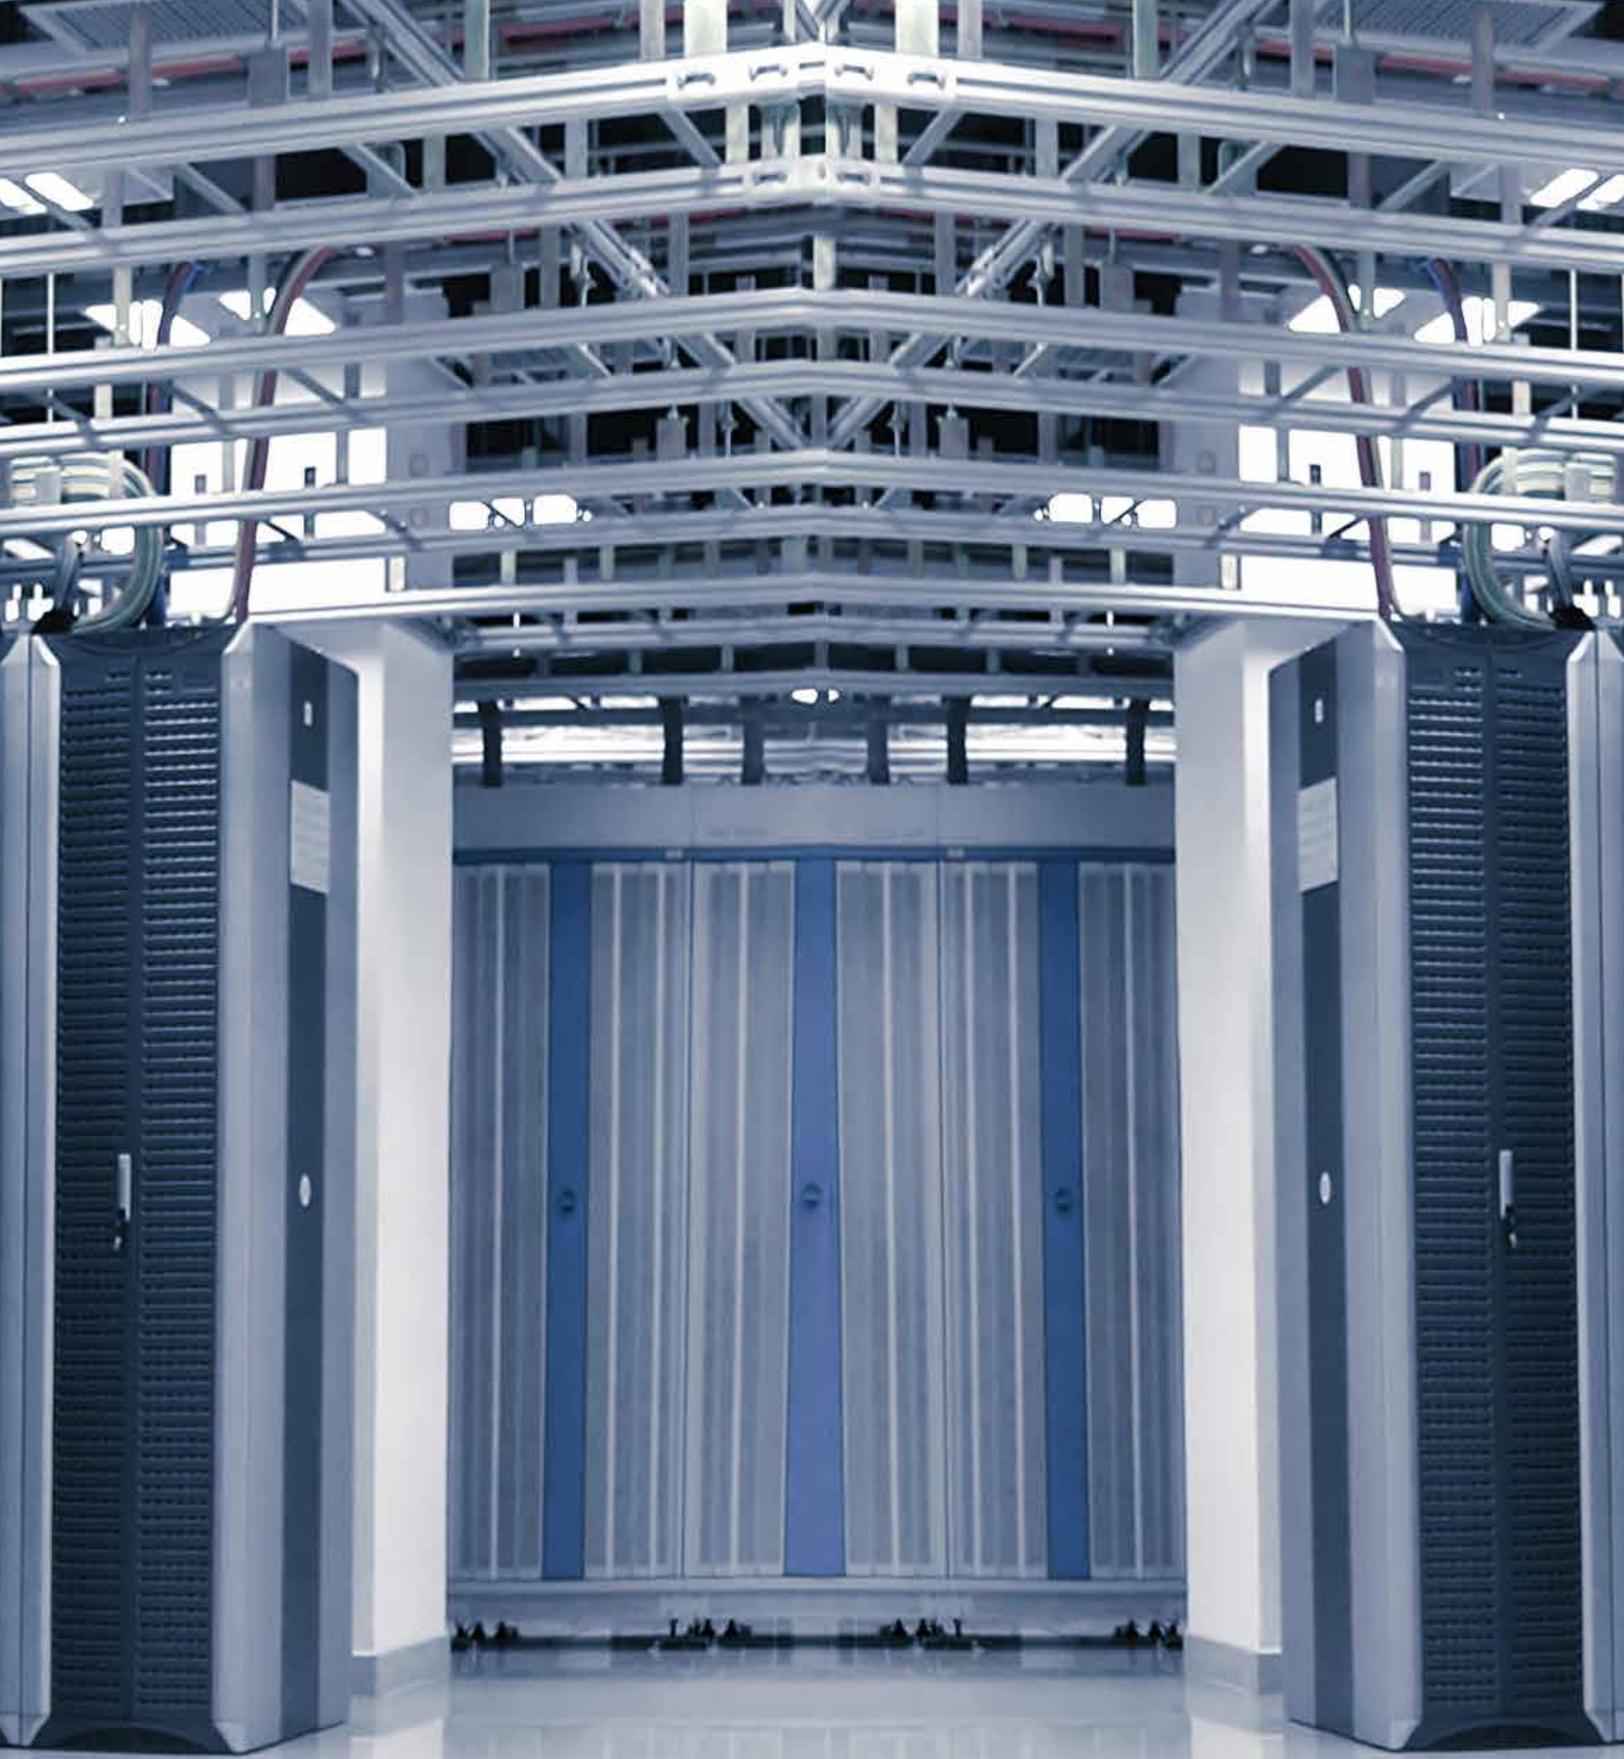

Redefining wireless access control.

K100 Cabinet Lock

Add security and accountability to cabinets, lockers and drawers

The HES K100 wireless cabinet lock with Aperio® technology expands access control to lockers, drawers or cabinet doors. Control and track access to pharmaceuticals, prototypes, restricted documents, evidence, tools and high value materials through the use of existing ID badges.



K100 Features & Benefits

- Works with cabinet doors and lockers with door thickness up to 1-1/2"
- Static strength 150 lbs
- Latchbolt locked state monitoring
- Product options: black or white finish; round, thumbturn, lever
- Optional mechanical key override
- Credential support:
 - 13.56 MHz credentials (SE option):**
 - HID iCLASS®
 - iCLASS SE® (SIO-enabled)
 - iCLASS Seos®
 - ISO 14443B UID
 - MIFARE Classic®
 - MIFARE Plus®
 - MIFARE DESFire® SE
 - MIFARE DESFire EV1
 - NFC-enabled mobile phones
 - 125 kHz credentials (PA option):**
 - HID Prox
 - EM Prox
 - AWID Prox

KS100 Server Cabinet Lock

Protect sensitive data and equipment while ensuring compliance

The HES KS100 server cabinet lock with Aperio® technology helps address the security needs of data centers and colocation facilities by providing real-time access control to individual cabinet doors in a single-card system. Prevent data breaches and equipment failure that can be costly and damaging to any business.

KS100 Features & Benefits

- PoE hardwired via standard IEEE 802.3af, 48 VDC Power over Ethernet (PoE Injector not included)
- Optional 24 VDC (+/- 10%) Input
- Designed for standard 25 mm x 150 mm server lock openings
- Static strength 250 lbs
- Locked state and optional extended DPS monitoring for door position status
- Mechanical key override capable with SFIC (SFIC not included)
- Credential support:
 - 13.56 MHz credentials (SE option):**
 - HID iCLASS®
 - iCLASS SE® (SIO-enabled)
 - iCLASS Seos®
 - ISO 14443B UID
 - MIFARE Classic®
 - MIFARE Plus®
 - MIFARE DESFire® SE
 - MIFARE DESFire EV1
 - NFC-enabled mobile phones
 - 125 kHz credentials (PA option):**
 - HID Prox
 - EM Prox
 - AWID Prox



IN100 Lock

Expand your access control system easily and affordably

Available from ASSA ABLOY Group brands Corbin Russwin and Sargent, the IN100 lock with Aperio® Technology makes access control easy and affordable. This next generation lock offers the convenience and flexibility of Aperio wireless technology with the real-time communication of online access control. As part of the Aperio family of wireless locks, the IN100 offers easy expansion of existing access control systems to bring a new level of control to your facility.



IN100 Features & Benefits

- Industry leading ANSI/BHMA Grade 1 hardware offers the highest degree of physical security available in access control locks
- Quick and easy installation
 - Integrated reader, monitoring and short range wireless radio simplifies installation and reduces material costs
- Real-time door status monitoring with REX, DPS, tamper and low battery signals
- Lockdown capability allows the IN100 to respond to lock/unlock commands from a host EAC system in less than 10 seconds in battery-powered applications
- Support for passage mode scheduling offers convenience for office environments
- Available in cylindrical lock, mortise lock and exit device configurations, offering the flexibility to support a variety of openings
- Credential support:
 - 13.56 MHz credentials (SE option):**
 - HID iCLASS®
 - iCLASS SE® (SIO-enabled)
 - iCLASS Seos®
 - SIO® on MIFARE Classic®
 - SIO on MIFARE® DESFire® EV1
 - MIFARE Classic
 - DESFire EV1
 - NFC-enabled mobile phones
 - 125 kHz credentials (PA option):**
 - HID Prox
 - Kantech ioProx
 - AWID
 - EM4102
- Patent-pending credential cache ensures access when the lock is offline from the EAC system

PR100 Lock

Bring access control deeper into your facility

PR100 Features & Benefits

- Industry leading ANSI/BHMA Grade 1 hardware offers the highest degree of physical security available in access control locks
- Quick and easy installation
 - Integrated reader, monitoring and short range wireless radio simplifies installation and reduces material costs
- Real-time door status monitoring with REX, DPS, deadbolt, tamper and low battery signals
- Available in: 10 Line Bored Lock; 8200 Series Mortise Lock; 80 Series Exit Device, offering the flexibility to support a variety of openings
- Available with keypad for two-factor authentication
- Credential support:
 - Supports HID®125 kHz Prox or 13.56 MHz iCLASS® contactless credentials

The Sargent PR100 lock with Aperio® Technology makes it easy and cost-effective to bring access control to additional doors. It uses local wireless communication between an Aperio lock and hub to connect to an access control system, eliminating the greatest cost and inconvenience of traditional access control – the wiring at the door.





A wireless solution that is truly easy.

Aperio® Hubs

Designed for easy integration into existing access control systems, Aperio-enabled locks communicate wirelessly to an Aperio hub, which connects to the access control system using Ethernet, RS-485 or Wiegand wiring.

Order String	Description	Max. # Devices Supported by Hub	Conductors Required	Communication Interface
AH-20-W14-NNNN	Wiegand Hub	1	12	Wiegand
AH-30-R12-NNNN	Generic RS-485 Hub	8	5	RS-485
AH-30-RN1-(XXXX)*	Mercury-Powered RS-485 Hub	8	5	RS-485
AH-30-R25-NNNN	VertX® Hub	2	5	RS-485
AH-40-IN2-NNNN	IP Hub	16	Cat 5 or higher	IP


* Replace (XXXX) with Mercury Access Control Manufacturer Partner Code.

Aperio Hub Specifications


- Wireless Coverage Range: Up to 50 feet between the Aperio locking device and communication hub on building environments**
- Voltage: 8 to 24 VDC
- IP Hub: Supports PoE, IEEE 802.3af compliant Class 1 powered device (PD)
- Maximum Standby Current: 80 mA at 12 VDC /250 mA at 24 VDC
- Operating Temperature: 41 to 95° F (5 to 35° C)
- Operating Humidity: 0 to 95% relative humidity non-condensing
- Monitoring: AH20 includes 4 form C relays for door status monitoring (DPS, REX, battery, tamper)

** An optional external antenna (part no. EXT-10-ANT) with max antenna gain of 3.9 dBi (SMA connector) is available for use with AH20, AH30 and AH40 Aperio hubs. This is a 2.4 GHz dipole, omnidirectional antenna that may be used to obtain a more uniform coverage pattern (in the form of a doughnut) around the hub. Please note that this does not extend the maximum range of the hub and is limited to no more than 25 feet between the locking device and hub (reference illustrations to the right).

Wireless Coverage

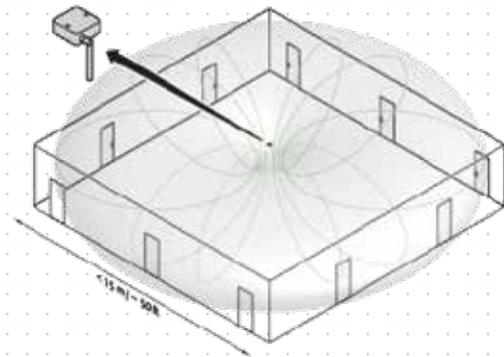


With external antenna

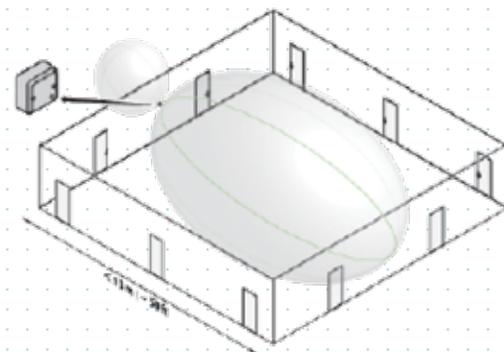

Without external antenna


IP Hub

The IP Aperio hub uses standard Ethernet cabling to connect to IP-based access control systems and supports up to 16 devices per hub.

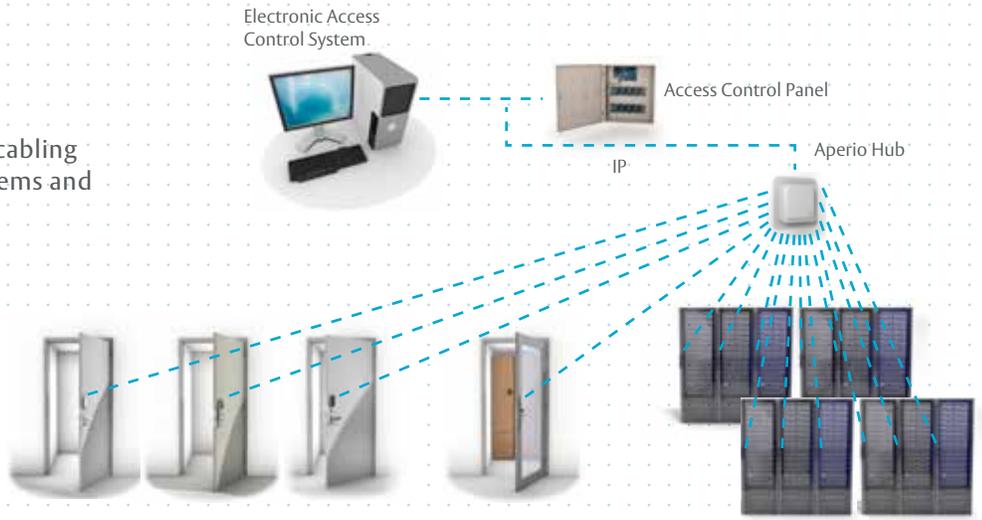


1:8 Hubs

The Mercury-Powered and standard RS-485 versions of the Aperio hub offer the flexibility and scalability to support up to eight devices per hub*.

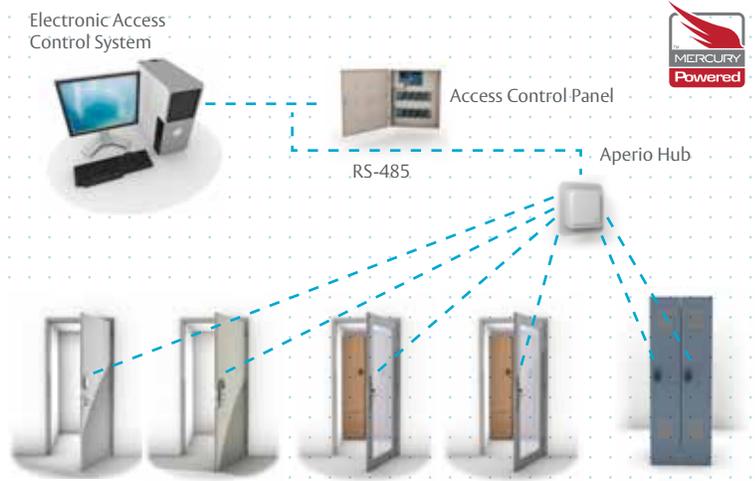


VertX-Powered Hub

The VertX®-powered Aperio hub connects to the access control system using RS-485 wiring and supports up to two devices per hub.

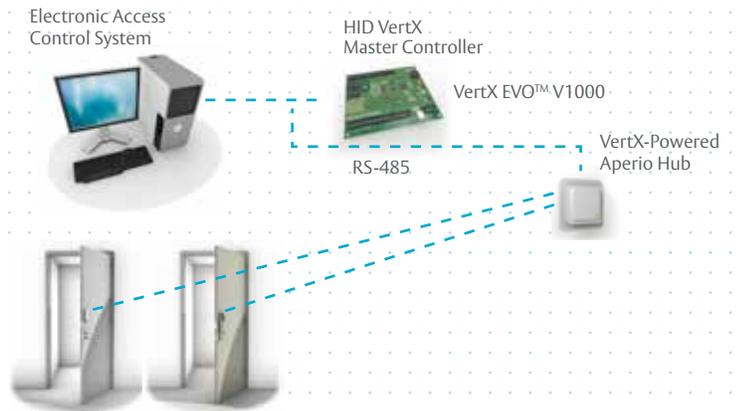

Wiegand Hub

Industry standard Wiegand output offers easy integration with many popular access control systems.

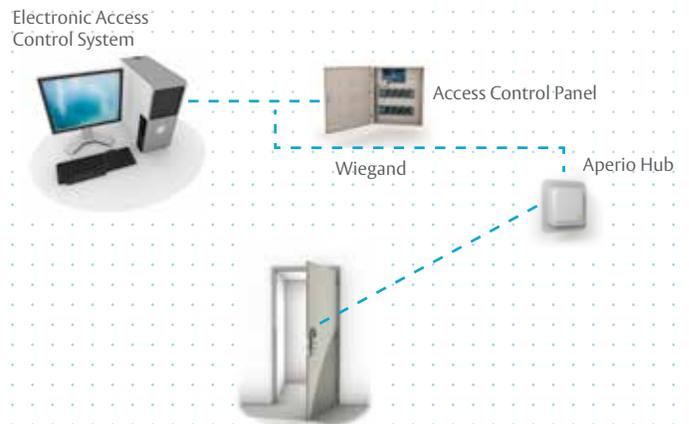

* Must be supported by EAC system.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

ASSA ABLOY

ELECTRONIC SECURITY HARDWARE
HES | Securitron

ADAMS RITE | CORBIN RUSSWIN
MEDECO | SARGENT

ASSA ABLOY Americas
110 Sargent Drive
New Haven, CT 06511
www.intelligentopenings.com

Door Security Solutions Canada
160 Four Valley Drive
Vaughan, ON L4K 4T9
www.assaabloy.ca

HID, iCLASS and iCLASS SE are registered trademarks of HID® Global Corporation.
The Mercury Powered trademark is used under express license from Mercury Security Corporation.

Copyright © 2011–2018, ASSA ABLOY Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Inc. is prohibited.

Effective 4/2018
2500-3913