



BluCHIP EMR-32RELAY-FID

BluCHIP EMR-32RELAY-FID Elevator System I/O for up to 32 Total Floor Stops w/ Floor ID

The BluCHIP EMR-32RELAY-FID is a Relay Elevator System I/O that supports up to 32 floor stops with Floor ID. The Floor ID feature allows the security system to capture elevator controller feedback of the floor selected by the user. The kit is designed to be installed in an elevator machine room and works in conjunction with an EMR Controller kit. The kit is configured with space to add backup battery and utilizes an FPO power supply to generate 24VDC and a B100 to generate 12VDC. It includes two Mercury MR16IN and two MR16OUT boards, two locking enclosures with tamper, power supply and wiring speed kits in each.



System Features

FPO offline power supply

- 120 or 230 VAC input
- 12 and 24 VDC outputs
- On board Fire Alarm Interface
- Continuous and resettable DC

Distributed output module

- Four, controlled fused at 3A each
- Eight, auxiliary Class II P limited at 2.5A each

Expansion options

- Increased power, multiple voltages
- Additional distribution outputs
- Power management

Specifications

Input Power:

- Input 120/230VAC 50/60Hz | 200 Watts
- Overload and short circuit protection
- Over temperature protection
- Polarized AC power supply disconnect

Output Power:

- 150W Total Output Power | 12VDC/12A or 24VDC/6A
- 5-18VDC @ 4A Max. | FPO Board Outputs: Continuous (DC1), Resettable (DC2)
- 8 Lock Outputs, 8 Auxiliary Outputs, Class 2 PL @ 2.5A each
- 120mV Output Voltage Ripple | System Efficiency: 88% | System BTU Rating: 66 BTU/Hr

Battery Charging:

- Independent built-in 2A (FPO150) Charger for sealed lead-acid or gel type batteries
- Microprocessor dual rate charging of 12 or 24V battery sets
- Automatic switchover to standby battery when AC fails
- Zero voltage drop when switched over to battery backup

Enclosure Features

Labor saving design

- Unified power and security in one enclosure
- Pre-wired power section
- Removeable backplate simplifies installs
- Speed kit is included for power and data wiring
- Includes mounting studs on doors to add additional I/O boards.

Additional benefits

- Wire management room
- 4.5" enclosure depth fits battery set
- Tamper switch, lock, dual key set standard
- Mounting hardware for access boards included

Regulatory Compliance:

- UL294, UL603, UL864, UL1076, UL1481, UL2044, UL2572, ULC S318, ULC S319, ULC S527
- CSA C22.2 #107.1, FCC Part 15, CSFM Approved


Access Panel:

- (1) MR16IN, (2) MR16OUT
- 32 Inputs | 32 Outputs

Size and Weight:

- 24.00"H x 20.00"W x 4.50"D | 42 lbs.

Recommended board layout

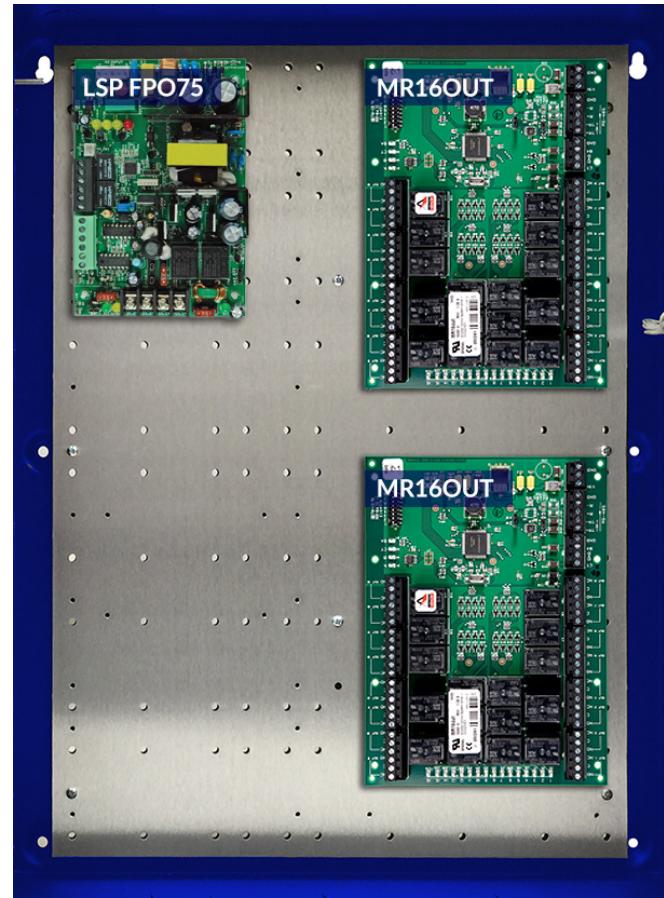

Kit Includes

MFG Part #	BluBØX Order #	QTY	Description
MR16IN	120-2100	2	Mercury MR16IN: 16 Programmable Inputs & 2 Prog Form C Relays 12/24VDC
MR16OUT	120-2200	2	Mercury MR16OUT: 16 Programmable Form C Relays 12/24VDC
E2M-SK-4	577-3010	1	BluBØX E2M-SK-4 Speed Kit: Two board precut DC power and RS485 wiring kit
FPO150-B100D8PE4M1	670-1320	1	LifeSafety Power: Single voltage power supply, includes enclosure

Ordering Information

BluBØX Order #	Description
753-4100	BluCHIP EMR-32RELAY-FID Elevator System I/O for up to 32 Total Floor Stops w/ Floor ID

BluBØX: Security Re-Imagined
www.blub0x.com
 e. info@blub0x.com
 p. (844) 425-8209
 FOLLOW US ON  

BluBØX Security, Inc. is a manufacturer and service provider of web-cloud based physical security products. Its BluSKY service delivers enterprise class unified access control, alarm management, video surveillance, biometrics and visitor management on any device, anywhere, any time. Its BluCHIP open hardware platform provides industry standard components and a proprietary line of fully integrated multi-factor, multi-biometric Person Readers.